

Kriegsmarine F-Lighter

1/350 Scale Resin & Photo Etched Metal Kit

ATLANTIC MODELS





1 Hillview Grove, Easington, Durham, SR8 3NT. UK Tel. 0191 5271574 e.mail: peter@atlanticmodels.net Website http://www.atlanticmodels.net

Parts List






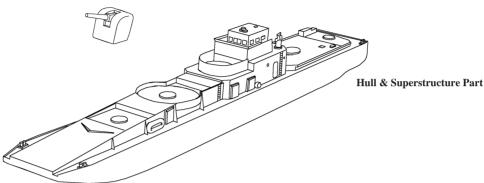

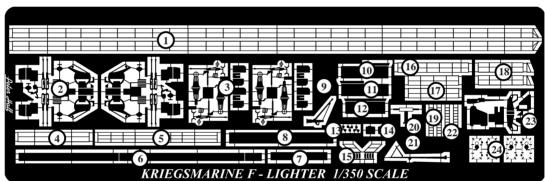

- Main Deck Safety Railing
- 2cm C38 Flakveirling Assembly
- 2cm Single Mounting
- Stern Railing
 Bridge Roof Railing
 Aft Gun Deck Side Bulwarks
- Aft Gun Deck Rear Bulwark
- 3.7cm Mounting Splinter Shield
- Forward Crane
- Bridge Splinter Shield (Starboard Side)
- Bridge Splinter Shield (Port Side) Bridge Splinter Shield (Front)
- Propellers Rudders
- 14
- Inclined Ladders 15.
- 2cm Single Deck Rear Railing 16.
- 2cm Single Deck Side Railing
- 3.7cm Deck Side Railing
- Aft Vertical Ladders
- Rangefinder Arms
- Mast
- Forward Vertical Ladders
- 21. 22. 23. 3.7cm Gun Assembly Watertight Doors

3.7cm Single AA Mounting

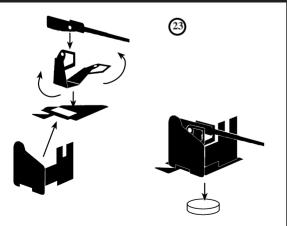

Fold the centre piece of the gun mounting so that the two sides are parallel. Fit on to the base plate as shown.

Locate the gun barrel between sides of the mounting and secure into position by passing a piece of 10 thou wire or stretched sprue through the holes. The gun barrel can be set at any elevation desired.


Fold the shield to 90° and fit the recess on the side plate over the extended foot plate. Ensure the barrel passes through the larger of the two slots and not through the sighting slot.

sighting slot.

Fit the completed mounting on to a circle of plasticard before fitting in to position on the model.

2cm FlakVeirling C38


Cut out block of plasticard and place between the lower parts of the centre



Fold gun layers seats on each side of the base plate to shape as shown above. Fold the centre section of the mounting so that the two sides are parallel. Fit the pairs of barrels to each side,

ensuring that they are parallel with each other. Fit the shield plates to each side of the mounting as shown

2cm Single AA Mounting





Fold the mounting pintle in half so that etched detail appears on each side, at the same time trapping the extender tube on the underside of the gun in between. Fold the shoulder braces to the shape shown above. Fit the shield centrally to the locating lug below the gun.


Gun mounting pintles have been moulded in place on the upper deck, and will need to be removed if this mounting id to be fitted

deex, and wan asset in complete.


Alternatively just the etched metal gun barrel and shield may be fitted to the top of the moulded pintle if desired.

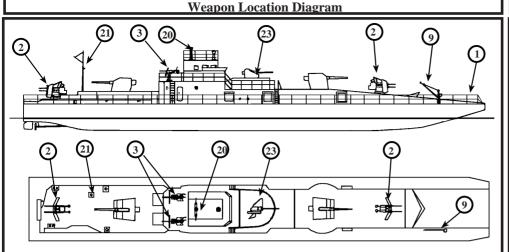






Propellers and Rudder Fitting Bridge Area Details

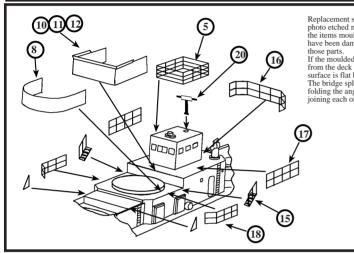


Replacement splinter shields have been provided in photo etched metal, where there is a possibility that the items moulded in place on the superstructure may have been damaged or distorted due to the frailty of those parts.

have been damaged or distorted due to the frailty of those parts. If the moulded shields are damaged then remove them from the deck with a sharp blade and ensure that the surface is flat before fitting the replacement items. The bridge splinter shield will need to be assembled by folding the angled lip on the top edge outwards, and joining each of the side sections to the front section.

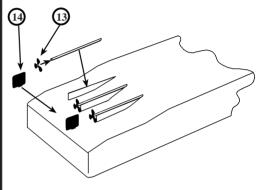

If the model is being built as a full hull display, fit the propellers onto 20thou (.5mm) brass or plastic rod, then fit in place on to the shaft fairings that are moulded to the lower hull. Fit the two rudders in place so that they are lined up between the inner and outer propellers.

Colour Chart and Painting Guide

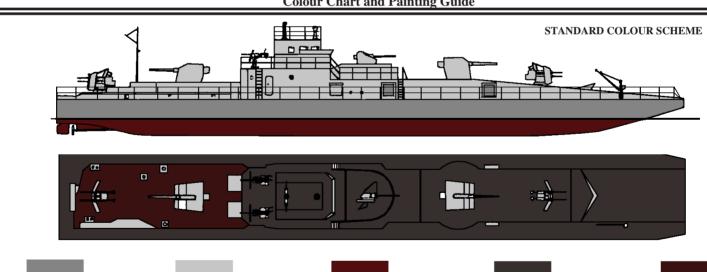




Hell Grau 50 WEMCC KM 01

Schiffsbodenfarbe III Rot 5 WEMCC KM 04

WEMCC KM 06

Deck Grey Dunkel Grau 2 German Camouflage Red Brown WEMCC ACS 16

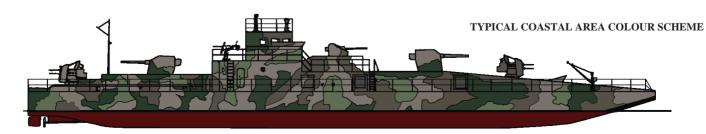

Dunkel Grun WEMCC ARG 05

Hell Grun WEMCC RM 05

Dunkel Braun WEMCC ACRN 10

Stein Grau WEMCC ACUS 05

